

CHROME BRIDGE TAP CARE, INSTALLATION AND GUARANTEE INFORMATION

Model code: B/BRI4/CH and K/BRI4/CH







INSTALLATION GUIDE

Thank you for purchasing your Caple tap.

These taps have been manufactured and inspected to exacting standards and are guranted to give years of trouble free operation providing our care and installation guidelines have been followed.

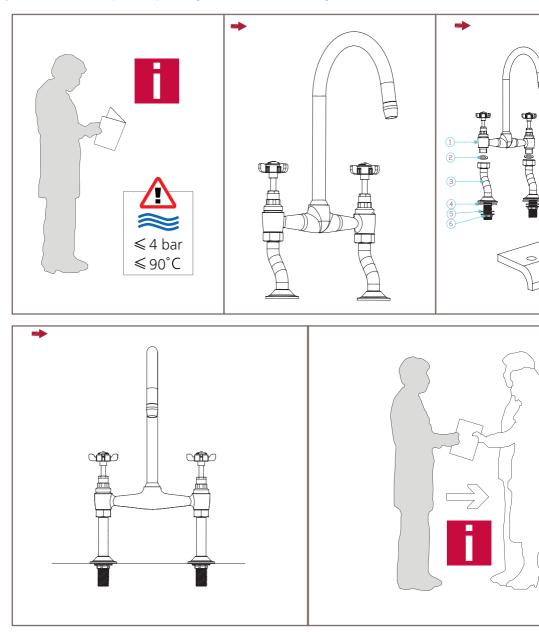

NOTE: Please see back page for installation instructions

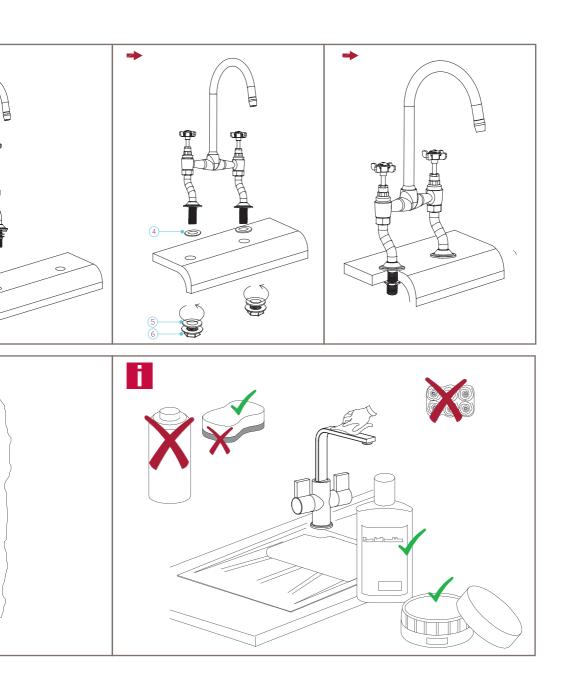

INSTALLATION INSTRUCTIONS

- Fix the two offset legs to the tap body, make sure the washers (part no.2) are used to seal water, and adjust the reach between the two offset legs for 180mm, then tighten the hex nuts.
- Remove the washer and back nut (part no.5 and 6) from the threaded tail, put the tap into the fixing holes of the worktop, and fix back the washer and back nut onto the threaded tail underneath the worktop and tighter them.

CARE OF YOUR TAPS

- Only clean your taps with soap or mild liquid detergent and clean water then dry using a soft cloth
- Do not use chemical cleaners, or bleach based solutions to clean your tap, contact could affect the finish of your tap.

PRE INSTALLATION CHECKS

- The temperature of the hot water supply must not exceed 90°C.
- Water pressure requirements: minimum required pressure varies dependent on model, maximum pressure 4 bar.
- Always seek advice from a qualified installer to ensure your installation and water supply to your taps comply with the water regulation (WRAS) requirements and good plumbing practice.

POST INSTALLATION POINTS

- We suggest when connecting screw connections that PTFE tape is used before the joints are fully tightened.
- Before use correctly check the installation for leaks, and turn the hot and cold water on to thoroughly flush any small particles that may have been dislodged during the tap installation.
- THESE INSTRUCTIONS ARE INTENDED AS A GUIDE, IF IN ANY DOUBT ENSURE YOU SEEK ADVICE FROM A CERTIFIED PLUMBER.

- Connect the hot and cold water supply and check for leakage.

PLEASE NOTE

- Ensure the hot and cold pipes are thoroughly flushed to remove any debris.
- 2 x 25mm holes are required in either the sink or worktop.
- Do not use abrasive cleaners, liquids, powders or pads.
 These will damage the finish of your tap and void the quarantee.
- Provided all of the above points are adhered to the surface finish of your Caple Tap is guaranteed for 5 years.
- It is good practice to ensure that both hot and cold water supplies to your tap are of an equal pressure to provide a consistent flow. If supplies are not of equal pressure then a non return valve should be fitted on the hot inlet.
- Supplies of water should be from a common source (mains or tank fed).
- We recommend that a service valve is installed in the supply lines to the tap to enable water isolation if required.

GUARANTEE

- Your Caple tap is guaranteed for 5 years.
- Should you have any defects as detailed above during the appropriate guarantee period we guarantee to repair or replace the defective products or parts, or, at our option refund the purchase price assuming we were advised immediately of any claim in writing.
- It is important that you keep a proof of purchase (such as your receipt) to facilitate your guarantee.

TERMS AND CONDITIONS

- Guarantee conditions are only valid if the Care guidelines listed above are followed.
- Our obligation under the guarantee is to the original purchaser, and may not be transferred.
- The guarantee is valid for UK domestic installations only and relates to defects in manufacture, materials and workmanship only.
- Issues that arise due to normal wear and tear (for example valves, discs or washers), poor installation, improper use or accidental damage are not covered by the Caple guarantee. Spare parts can be purchased from our Customer care helpline 0117 938 1900.
- No liability is accepted for consequential damage to other household fixtures, fittings or furnishings relating to any claim even if attached to the product.
- If it is more economically viable a replacement tap will be supplied, this tap might vary from the original design should range changes of occurred since the initial supply.
- We reserve the right to inspect any tap before committing to support under the guarantee conditions.